



UTX CHAIN BLOCK

Engineered for longevity, reliability and efficiency in the most demanding industrial environment, UNITEX Chain Block is built with high quality materials chosen for their durable properties.

Used in Industries



Two points support the driving shaft is fixed by cantilever structure

Material hook is made of alloy steel, undergoing heat treatment and also includes a cast safety latch


G80 Electrophoresis load chain according to ISO16877

Manufactured in accordance to EN13157 meets all pertinent world standards

Safety factor 4:1

Opening style cover with curved edge, makes it easy for hand chain replacement and smoother operation

Friction disc and ratchet are replaceable

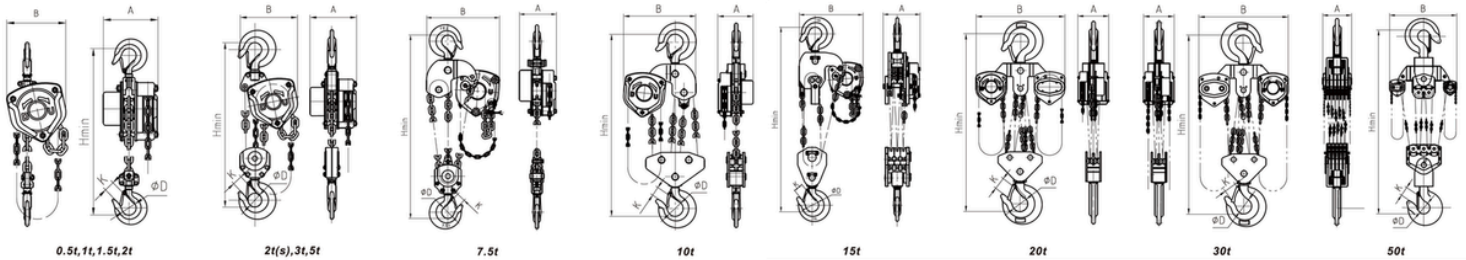

TECHNICAL SNAPSHOT

| Model | | UTX005 E619 | UTX010 E619 | UTX015 E619 | UTX020 E619 | UTX030 E619 | UTX050 E619 | UTX100 E619 | UTX150 E619 | UTX200 E619 | UTX300 E619 | UTX500 E619 |
|--|------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Capacity | tons | 0.5 | 1 | 1.5 | 2 | 3 | 5 | 10 | 15 | 20 | 30 | 50 |
| Load Chain | mm | 6x18 | 6x18 | 8x24 | 8x24 | 8x24 | 10x30 | 10x30 | 10x30 | 10x30 | 10x30 | 10x30 |
| Hand Chain | mm | | | | | | 5x25 | | | | | |
| Strands Of Load Chain | | 1 | 1 | 1 | 1 | 2 | 2 | 4 | 6 | 8 | 12 | 22 |
| Strands Lift | | 3 | 3 | 2.5 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Moving Distance Of Load Wheel With One Meter Lifting | m | 33.3 | 41.5 | 55.6 | 72.6 | 111.2 | 163.4 | 326.8 | 490.7 | 326.8x2 | 490.2x2 | 897.7x2 |
| Effort Required To Lift Rated Load | N | 200 | 320 | 360 | 365 | 385 | 435 | 435 | 435 | 435x2 | 435x2 | 435x2 |
| Running Test Load | KN | 6.13 | 12.25 | 18.38 | 24.5 | 36.75 | 61.25 | 122.5 | 183.75 | 245 | 367.5 | 612.5 |
| Dimensions (mm) | A | 137.5 | 146.5 | 170 | 170 | 170 | 190.4 | 190 | 241 | 209 | 312 | 496 |
| | B | 137 | 162 | 183 | 194 | 220 | 288 | 384 | 416 | 625 | 691 | 958 |
| | Hmin | 270 | 340 | 399 | 414 | 512 | 636 | 743 | 918 | 890 | 1380 | 2578 |
| | D | 35 | 35.5 | 45 | 42.5 | 50 | 64 | 85 | 96 | 110 | 110 | 170 |
| Extra Weight Per Metre Of Extra Lift | KG | 1.6 | 1.6 | 2.2 | 2.2 | 3.6 | 5.2 | 9.5 | 14.6 | 19 | 27.7 | 49.4 |
| Net Weight | KG | 8.7 | 10.8 | 15.2 | 18 | 24.3 | 38.7 | 78 | 115 | 163.6 | 220 | 1092 |

*Note: Actual weight may vary