


UTX PUSH & GEARED TROLLEY

We specialize in providing reliable and high-quality I-beam trolleys that are designed to meet your specific needs. Our trolleys are built with durability in mind and are available in a wide range of options to choose from


Used in Industries

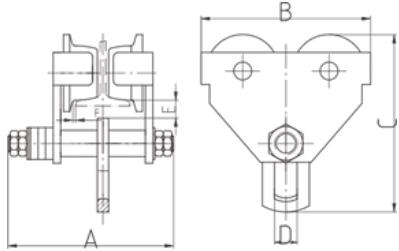

TECHNICAL SNAPSHOT

	UTX005-PT	UTX010-PT	UTX020-PT	UTX030-PT	UTX050-PT	UTX100-PT
Capacity (t)	0.5	1	2	3	5	10
Proof Load (t)	0.625	1.25	2.5	3.75	6.25	12.5
I-Beam Width (mm)	64-305	64-305	76-305	76-305	88-305	125-305
Dimensions (mm)	A	230	254	294	344	360
	B	212	255	302	344	378
	C	198.5	231.5	278	338	393
	D	24	30.5	36	45	60
	E	28	25	27	32	34
	F	≈3	≈3	≈3	≈3	≈5
Min. Radius Curve (m)	0.6	0.8	1.1	1.4	1	1.3
Net Weight (kg)	7	12	20.5	33	51	86.5

*Note: Actual weight may vary

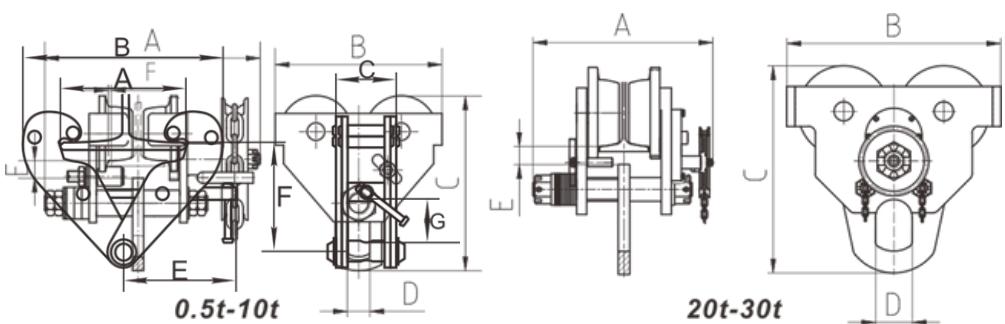

TECHNICAL SNAPSHOT

	UTX005-GT	UTX010-GT	UTX020-GT	UTX030-GT	UTX050-GT	UTX100-GT	UTX200-GT	UTX300-GT
Capacity (t)	0.5	1	2	3	5	10	20	30
Proof Load (t)	0.625	1.25	2.5	3.75	6.25	12.5	25	37.5
I-Beam Width (mm)	64-305	64-305	76-305	76-305	88-305	125-305	136-305	144-305
Dimensions (mm)	A	308.5	328.5	361.5	428.5	434	487.5	523
	B	212	255	302	344	378	455	642
	C	198.5	231.5	278	338	393	490	622
	D	24	30.5	36	45	60	82	110
	E	28	25	27	32	34	36.5	54
	F	≈3	≈3	≈3	≈3	≈5	≈5	≈5
Min. Radius Curve (m)	0.6	0.8	1.1	1.4	1	1.3	4.7	4.7
Net Weight (kg)	11.6	17	25.5	39	57	93	247.5	254

*Note: Actual weight may vary